



Nice to know

The colour ochre in the B

The colour ochre in the BLOQ logo refers to the rushes and the colour palette of the Golden Age in Holland.

# Our story

Being part of Betap, BLOQ can build on more than **100 years of experience** in the flooring sector. Betap grew from a local manufacturer of rush mats in 1918 to an internationally renowned carpet manufacturer.

Working with some of the most reputable architects, designers and commercial carpet partners, Betap's high-traffic commercial carpet is used across the world in prestigious office buildings, hotels, universities, museums and various leisure applications. Betap is your partner of choice for commercial carpet.



# High-end production line

Group Betap is an innovative carpet manufacturer in Genemuiden (The Netherlands) with a vertically integrated production line for tufted and non-woven floor coverings, as well as an own yarn production line.

With BLOQ, we are developing and producing **creative carpet tiles** that comply with the stringent regulations for the commercial market. We offer high-performance tiles focused on office projects, that are sound absorbing and have the best results in fire safety. Our products are also produced following the strictest standards in sustainability.



# The Workplace

RHYTHM is part of The Workplace collection. With this mainstream collection group you mark your own, personal workspace. Feel free to play and combine with three collections: TRADITION, CONNEXION and RHYTHM.

The Workplace collections also match perfectly with our The Binary collection, which uses the same colours.

A mixed striped pattern made to unite RHYTHM CONNEXION TRADITION

### THE WORKPLACE

# RHYTHM






Inspiration is everywhere



## Get in line

RHYTHM is a carpet tile of 50 x 50 cm. This **basic tile** represents the regularity of daily life. It makes a perfect marriage with TRADITION. The **striped pattern** of RHYTHM unites two coloured zones, consisting of TRADITION tiles.

Do you feel the rhythm?

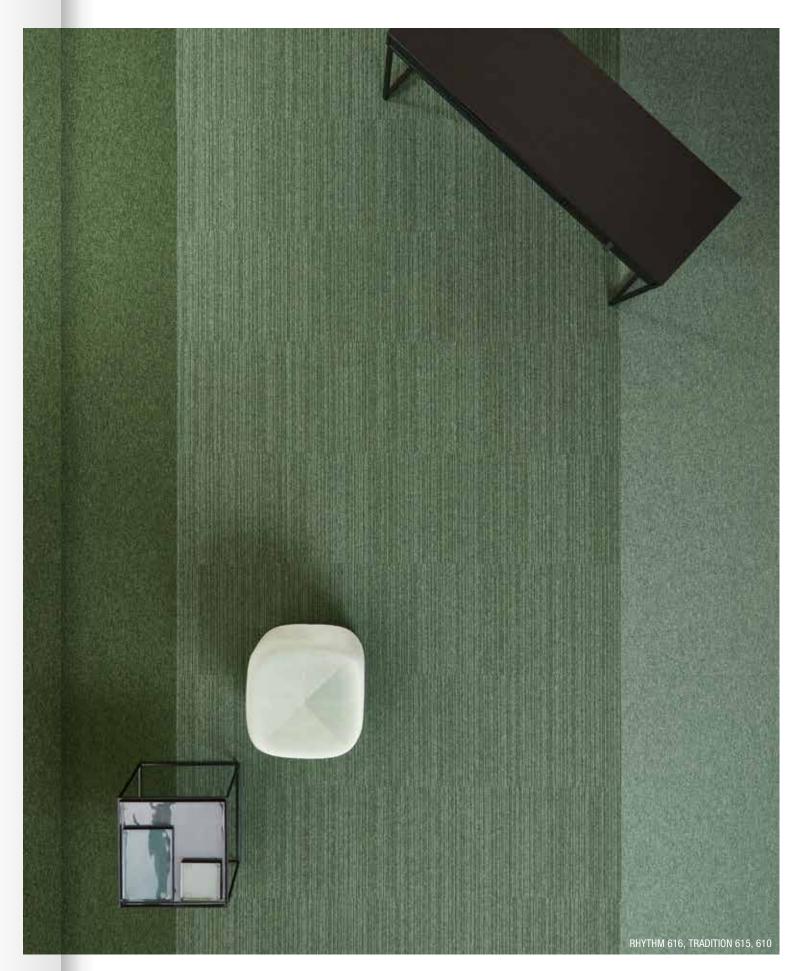





# Colour range


RHYTHM comes in **eight unique colours**: five tone-on-tone colours and three bright colours.

You can use the colours pure as they are, or combined. Discover the fun to play with the matching TRADITION tones and unite with the RHYTHM tiles.








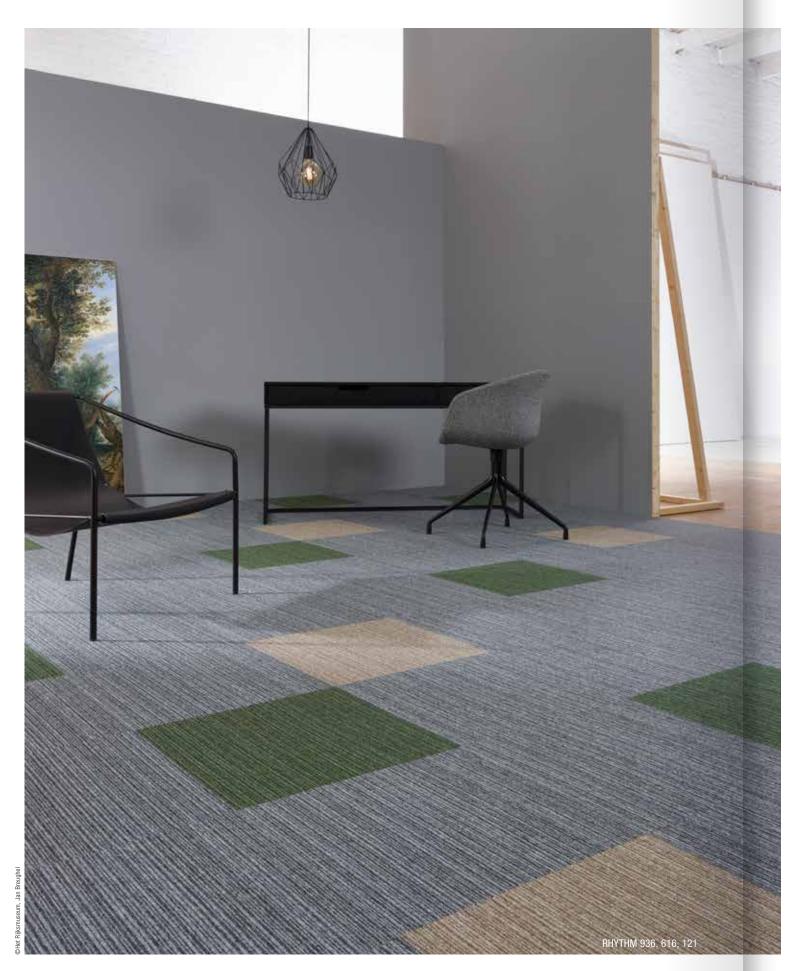




### Pure or mixed

Use the colours pure in **one colour tone or dare to mix** with other tones. Soft hues stimulate a homely feeling at work, current colours meet today's trends.

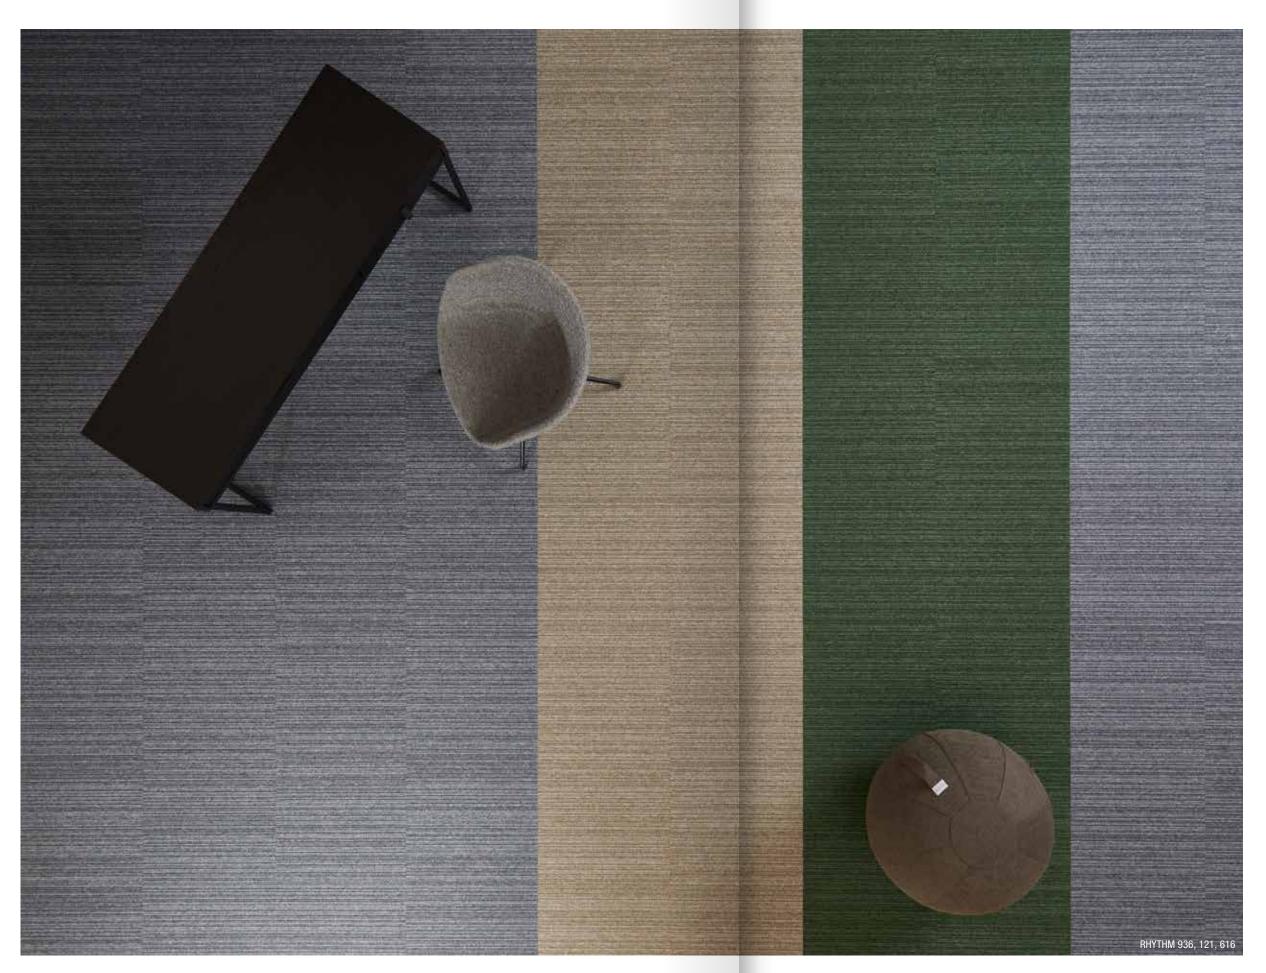

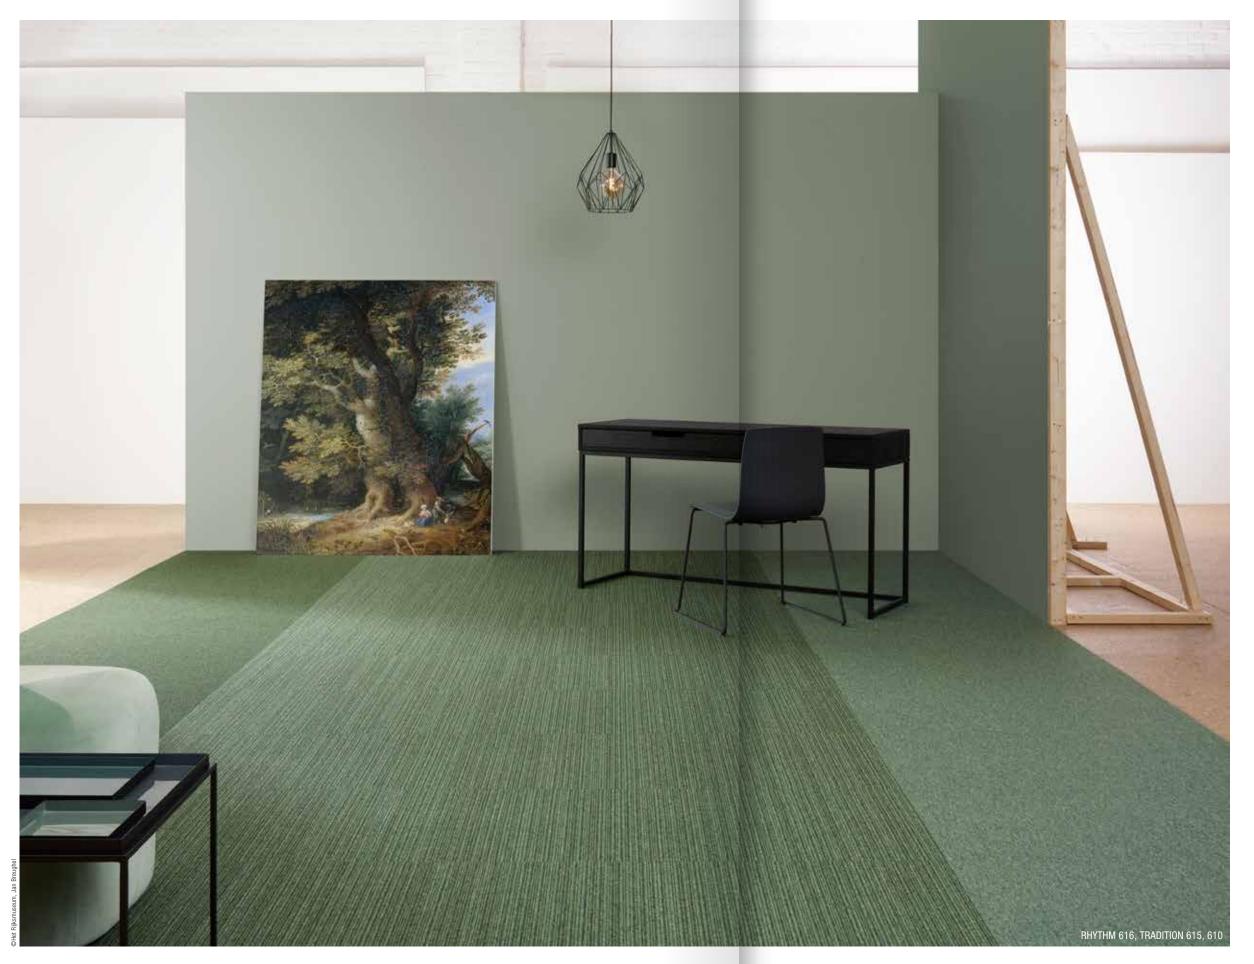

**20** BLOQ

### Highlights

#### **BITBACK**

BLOQ uses **Bitback**, Modified Bitumen, which consists of 70% recycled content.

Tiles made with Bitback deliver great acoustic results such as **high sound absorption** and insulation, as well as **noise reduction**. Therefore carpets made with this sustainable backing contribute substantially to personal health and comfort.





#### SOLUTION DYED YARNS

BLOQ uses 100% Polyamide 6 Solution Dyed Nylon from **Aquafil**, the best and leading supplier for carpet manufacturers. Solution dyed means **better colour fastness** and the best results to light and water.

#### LIGHT REFLECTANCE VALUES

**Light Reflectance Value** (LRV) is a scale that measures visible and usable light reflected from an illuminated surface. The percentage identifies how much light a colour reflects or absorbs. 0% reflects no visible light, 100% reflects all light.

COLOUR	LRV av	L
121	18.60	50.21
216	10.39	38.53
521	4.87	26.35
616	7.20	32.27
811	10.11	38.03
906	23.10	55.19
936	12.83	42.50
941	7.59	33.12





THE WORKPLACE

### RHYTHM

#### **SPECIFICATIONS**

**TYPE OF MANUFACTURE** Tufted Loop Pile 1/10"

ISO 2424

PILE FIBER COMPOSITION 100% Polyamide 6

ISO 2424 Solution Dyed Nylon made by Aquafil

**SECONDARY BACKING** Bitback, Modified Bitumen

ISO 2424 70% Recycled Content

 $\textbf{DIMENSION} \quad 50 \text{ x } 50 \text{ cm}$ 

EN ISO 24342

**PILE WEIGHT** 540 g/m<sup>2</sup> ISO 8543

**SURFACE PILE WEIGHT** 330 g/m<sup>2</sup>

ISO 8543

TOTAL WEIGHT 4 250 g/m<sup>2</sup>

ISO 8543

**TOTAL THICKNESS** 6.0 mm ISO 1765

PILE HEIGHT 2.7 mm

ISO 1766

PILE DENSITY 0.123 g/m<sup>3</sup>

ISO 8543

 $\begin{array}{c} \textbf{NUMBER OF TUFTS} & 156\ 000\ /\text{m}^2 \\ & \text{ISO } 1763 \end{array}$ 

**DIMENSIONAL STABILITY**  $\leq 0.2\%$ 

ISO 2551

NUMBER

OF COLOURS

PACKAGING Box: 20 tiles / 5 m<sup>2</sup>
Pallet: 200 m<sup>2</sup>

### **PERFORMANCE**

CLASSIFICATION 33 EN 1307

LUXURY RATING LC1

EN 1307

**CASTOR CHAIR RATING** A: Intensive use

EN 985

FIRE CLASSIFICATION  $B_n$ -s1

EN 13501-1

 $\begin{array}{c} \textbf{IMPACT SOUND INSULATION} & \Delta L_w: 25 \text{ dB} \\ \text{EN ISO } 10140-3 \end{array}$ 

EN 130 10140-

 SOUND ABSORBTION
 Frequency Hz
 125
 250
 500
 1000
 2000
 4000

 EN ISO 354
 a<sub>s</sub>
 0.00
 0.02
 0.06
 0.16
 0.30
 0.35

NOISE REDUCTION a<sub>w</sub>: 0.15

EN ISO 354

 $\begin{array}{ll} \textbf{PERMANENT ANTISTATIC} & \leq 2 \text{ kV} \\ & \text{ISO } 6356 \end{array}$ 

100 0000

**TRANSVERSAL RESISTANCE** ≤ 1 X 10<sup>9</sup> Ohm

ISO 10965

THERMAL RESISTANCE 0.061 m<sup>2</sup> K/W

ISO 8302

**COLOUR FASTNESS TO LIGHT**  $\geq 7$  EN ISO 105-B02

**COLOUR FASTNESS TO WATER** ≥ 4

EN ISO 105-E01

 $\textbf{RUBBING FASTNESS} \quad \geq 4$ 

EN ISO 105-X12

GUT N° PRODIS 0D32FA3E









All rights reserved to alter technical specifications.

**↑** 

**1** 

22 BLOQ | De Blokmat 29, 8281 JH Genemuiden, The Netherlands | T +31 38 386 10 60, info@bloq.nl